

Polaris



Polaris

Inspiration is brought from the Italian north region, where Calacata Gold is originated from. A natural marble whose elegance is emphasized by its particular veining and the subtle combination of light grey and golden tones.

Porcelain Tile

⇒ ± 12"x24"

Polaris

Porcelain Tile






12"x24" 300x600 cm



White

12"x24" UPOLARI16BV

Other Faces

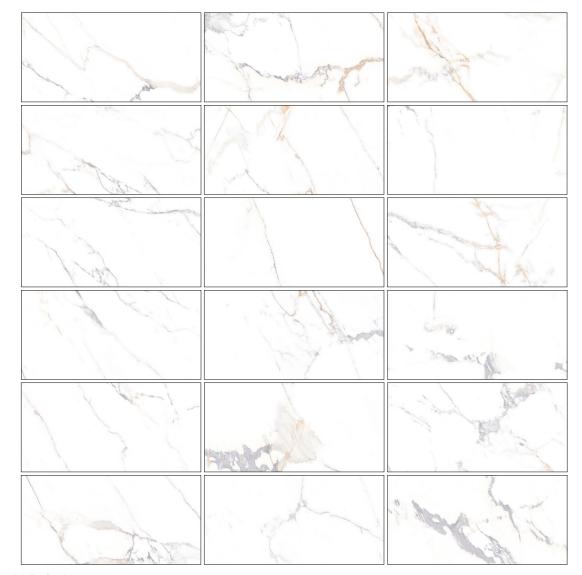

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	<=0.5%
Break Strength	C648	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹
Stain Resistance	C1378	Class A
Frost Resistance	C1026	Resistant
Thermal Shock Resistance	C484	Resistant
Crazing Resistance	C424	Resistant
Group	See FAQ's	4
PEI- Glazed Tiles	C1027	PEI (IV)
Dynamic Coefficient of Friction (DCOF)	A326.3	>=0.42
Shade and Texture Rating	CTDA "V"	V3
Facial Dimensions	C499	Pass
Range of Thickness	C499	Pass
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	Bx per pallet
12"x24"	17.44	9	32

4 | Polaris Polaris | 5