


Baguette data sheet

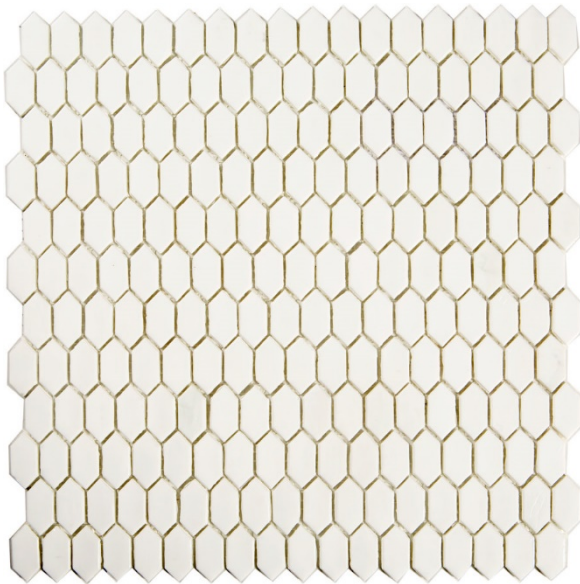

GLASS MOSAIC >
BAGUETTE/CASSETTONE/PUNTINI

Baguette collection

The products of the BAGUETTE series are manufactured through melting and casting of silica powders, melting substances and dye-stuff. The result are coloured glass mosaic tesserae of regular size and uneven edges. The colour of the mosaic tiles is never perfectly uniform, nor homogeneous; the colour variations cannot be reproduced exactly because they are an intrinsic feature of the

product. For the same reason, STON doesn't guarantee that it will reproduce exactly the colour or shade samples as shown in the catalogue or in any other displays. Slight scratches and surface imperfections, in some tiles are inherent of the product and the manufacturing process. Therefore they are acceptable and they do not constitute a reason for any claim.

Notes

For a better color enhancement of the mosaics it is recommended to use adhesives and sealants in matching color.

When the product is used on floors or walls in environments in contact with water, we recommend the use of reactive adhesives and epoxy sealants: H40 Extreme by Kerakoll* or Litoelastic Evo by Litokol*; Fugalite (for areas exposed to UV rays and not directly immersed in water it is recommended to use Fugalite Bio, insensitive to UV rays) by Kerakoll* or Starlike Evo (which can also be used as adhesive) by Litokol*. For the items with gold foil we recommend to use of bi-component epoxy adhesives, do not use cement-based glue. As well as we recommend to use of epoxy based grouting products only, following the manufacturer's instructions.

For maintenance and cleaning of glass mosaic use ordinary cleaning products (except those containing hydrofluoric or phosphoric acid), being careful to rinse thoroughly with water. Do not use alkaline cleaning products.

Packaging/weight:

Chip size: 15x30 mm/15x15 mm/10x10 mm	Sheet size: variable according to the chip shape	Thickness: 4 mm	Sqm/box: variable according to the chip shape	Pcs/box: variable according to the chip shape	Kg/sqm: 8,00
--	--	---------------------------	---	---	------------------------

Use:

Indoor: yes	Outdoor: yes	Flooring: yes	Wall covering: yes	Shower floor: yes	Shower wall: yes
Swimming pool: Yes (*no for gold foil)	Spa: yes	Bathroom countertop: yes	Kitchen countertop: yes	Heating floor: yes	

backing: back mounted on fiberglass mesh

surface: rough/satin

CARATTERISTICHE TECNICHE TECHNICAL DATA CARACTERISTIQUES TECHNIQUES TECHNISCHE DATEN	VALORE MEDIO AVERAGE VALUE VALEURS MOYEN MITTELWERT
ISO 10545-3 assorbimento d'acqua water absorption absorption d'eau Wasseraufnahme	Conforme According Conforme Gemaess
ISO 10545-4 sforzo di rottura breaking strenght force de rupture Bruchlast	Conforme According Conforme Gemaess
ISO 10545-4 resistenza alla flessione media average bending strenght résistance à la flezzion moyenne Mittlere Biegefestigkeit	Conforme According Conforme Gemaess
ISO 10545-9 resistenza agli sbalzi termici resistance to thermal shock résistance aux chocs thermiques Temperaturwechselbeständigkeit	Conforme According Conforme Gemaess
ISO 10545-14 resistenza alle macchie stain resistance résistance au tâches Fleckenunempfindlichkeit	Conforme According Conforme Gemaess
ISO 10545-13 resistenza agli agenti chimici (uso domestico e additivi per piscina) chemical resistance (domestic use and swimming pool chemicals) résistance à l'attaque chimique (usage domestique et additifs pour piscine) Säure-und Laugenbeständigkeit (gebrauch im Wohnbereich und Chemikalien für Schwimmbad)	Conforme According Conforme Gemaess
ISO 10545-15 Cessione di Cadmio e Piombo Lead and Cadmium release Perte de plomb et cadmium Agbabe von blei und cadmium	NPD NPD