KING'S LANDING

SPECIFICATIONS

Product Type

LOOP


Fiber Composition	100% Nylon (Polyamide 6)	
Dye Method	Solution Dyed	
Pile Weight	20 oz/yd ² (650 g/m ²)	
Number of Tufts	263980/m ²	
Machine Gauge	1/10"	
Primary Backing	Non-Woven	
Secondary Backing	StableShield-100% Vinyl	
Tile Size	9.8 in x 39.2 in (25 cm x 100 cm)	
Pile Height	4.0 mm	
Pile Height Total Tile Height	4.0 mm 7.0 mm	
5		
Total Tile Height	7.0 mm	



Performance Specifications

Wear Classification	Heavy Contract	
VOC Emission	ASTM D5116-06	<0.5 mg/m²/hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class 1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m² K/W
Impact Sound Insulation	ISO 140-8	ΔL _w 23dB
Sound Absorption Level	EN ISO 11654	α _w : 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	<450
The above Information is subject to modification for the banafit of further improvement. Manufacturing televance, 15%		

The above Information is subject to modification for the benefit of further improvement. Manufacturing tolerance: ±5%

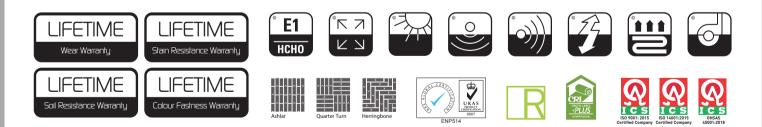

Standard Carpets Ind. LLC. Dubai Industrial City, Dubai UAE Phone:+971 4 554 7137 Fax:+971 4 554 7132 Email: info@standardcarpets.com www.standardcarpets.com

Made in UAE by

Standard Carpets. The largest manufacturer of tufted carpets and the only manufacturer of carpet tiles in the Emirates.

Standard Carpets are manufactured under the environmental quality system certified and complying with ISO 18001 by an accredited certification body.



