



ZEBRINO BIANCO


Porcelain Tile

CENTURA TILE

ZEBRINO BIANCO / Porcelain Tile



30 x 60 cm (12" x 24")
ZEBRINO BIANCO

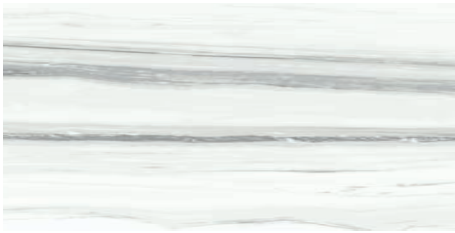

30 x 60 cm (12" x 24")
ZEBRINO BIANCO



5 x 5 cm (30 x 30 cm Sheet)
2" x 2" (12" x 12" Sheet)
ZEBRINO BIANCO
Bone Mosaics



5 x 5 (2" x 2")
28 x 33 (11" x 13")
ZEBRINO BIANCO
Hexagon Mosaics



5x15 (2" x 6")
28 x 33 (11" x 13")
ZEBRINO BIANCO
Picket Mosaics

PACKING INFORMATION

PRODUCT	THICKNESS	Pcs x Box	Sqm x Box	Sqft x Box	Kgs x Box	Lbs x Box	Box x Pal	Sqm x Pal	Sqft x Pal	Kgs x Pal	Lbs x Pal
30 x 60 (12" x 24") ZEBRINO BIANCO	8,0 mm.-0,32"	9	1,62	17,43	28,1	61,9	32	51,84	558,00	933	2028
33 x 33 (13" x 13") ZEBRINO BIANCO	7,8 mm.-0,31"	13	1,42	15,28	23,5	51,6	46	65,32	703,00	1100	2425
5 x 5 (2" x 2") - 28 x 33 (11" x 13") ZEBRINO BIANCO HEXAGON MOSAICS	8,0 mm.-0,32"	5	0,40	4,30	7,20	15	90	36,00	387,50	685	1510
5 x 15 (2" x 6") - 28 x 33 (11" x 13") ZEBRINO BIANCO PICKET MOSAICS	8,0 mm.-0,32"	5	0,39	4,20	7,10	15	90	35,10	377,80	675	1488
5x5 (2"x2") - 30X30 (12"X12") ZEBRINO BIANCO MOSAICS	8,0 mm.-0,32"	10	0,88	9,47	18	39,68	48	42,34	455,74	894	1971

GENERAL SPECIFICATIONS

		Appendix G Group BlaSerie: ZEBRINO BIANCO Porcelain tiles Appendix G Group Bia		MONTECERA AVERAGE VALUE
TECHNICAL FEATURES	NORMS	Requirement for Nominal Size N.		ZEBRINO BIANCO
		7 cm ≤ N < 15 cm	N ≥ 15 cm	Matt
LENGTH AND WIDTH	EN ISO 10545-2	±0,9mm.	± 0,6% ±2,0mm	Confirmed
THICKNESS	EN ISO 10545-2	±0,5mm.	± 0,5%	Confirmed
STRAIGHTNESS	EN ISO 10545-2	±0,75mm.	± 0,5% ±1,5mm	Confirmed
SQUARNESS	EN ISO 10545-2	±0,75mm.	± 0,6% ±2,0mm	Confirmed
SURFACE FLATNESS	EN ISO 10545-2	±0,75mm.	± 0,5% ±2,0mm	Confirmed
WATER ABSORPTION	EN ISO 10545-3	≤ 0,5%		≤ 0,5%
BREAKING STRENGTH	EN ISO 10545-4	1300 N		1400 N
MODULUS OF RUPTURE	EN ISO 10545-4	≥35 N/mm ²		≥ 40 N/mm ²
THERMAL SHOCK RESISTANCE	EN ISO 10545-9	Required		Resistant
FROST RESISTANCE	EN ISO 10545-12	Required		Resistant
CHEMICAL RESISTANCE	EN ISO 10545-13	Indicated by manufacturer		Resistant
RESISTANCE TO STAINS	EN ISO 10545-14	Indicated by manufacturer		Resistant
DCOF (Wet)	ANSI B 101.3	Indicated by manufacturer		> 0,42
SCRATCH HARDNESS (MOHS)		Indicated by manufacturer		Min. 6
ABRASION RESISTANCE (PEI)	EN ISO 10545-7	Indicated by manufacturer		4
SHADE VARIATION		Indicated by manufacturer		V3